

## ATTIC LADDERS

PRODUCT CATALOG 2022



[www.stairlux.com](http://www.stairlux.com)

**CONTACT US**

E-mail:  
[info@stairlux.com](mailto:info@stairlux.com)

Phone  
+ 1 (630) 686-5544

# STAIRLUXE

## WOODEN ATTIC LADDER

The GLOB attic ladders are characterized by single sealing and hatch thickness of 1.42". The GLOB model is perfect for houses where the attic is insulated and no additional thermal insulation is required. This model also has anti-skidding steps. They perfectly adhere to the ground, prevent scratching of the floor, creating an aesthetic finish at the end of the ladder. For increased safety and convenience of use, GLOB attic ladders are equipped with a stable and durable handrail. To ensure even greater comfort of use, the handrail can be installed on the left or right side – depending on the customer's preferences.

### GLOB TECHNICAL SPECIFICATION

Insulated hatch thickness	1.42 in
Thickness of thermal insulation	1.18 in
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	5.31 in
Width of ladder	15.7 in
Width of step	14.1 in
Depth of step	3.15 in
Landing space	52.8/57.1 in
Opening distance/angle	63/65.3 in
Maximum ceiling height	110.2 in



RVALUE



HANDRAIL



PROTECTIVE FEET



MAXIMUM LOAD



SEAL

#### AVAILABLE SIZES

43 X 21.5      47 X 23.5

#### SIZES ON REQUEST

47 X 21.5*	51 X 21.5*	55 X 21.5*
43 X 23.5*	51 X 23.5*	55 X 23.5*
43 X 27.5*	47 X 27.5*	51 X 27.5*
	55 X 27.5*	



R - VALUE FOR THE CENTER OF THE DOOR

Outer box dimensions, mounting opening 0.79 in larger

# STAIRLUXE

## LONG WOODEN ATTIC LADDER

The L-ALLE attic ladders are characterized by single sealing and hatch thickness of 1.02". The L-ALLE model is ideal for an environment where the attic is insulated and does not require additional thermal insulation. This model also has non-slip steps. They perfectly adhere to the ground, prevent scratching of the floor creating an aesthetic finish at the end of the ladder. For increased safety and convenience of use, L-ALLE attic ladders are equipped with a stable and durable handrail. To ensure even greater comfort of use, the handrail can be installed on the left or right side – depending on the customer's preferences. The excellent quality of materials used for the production of attic ladders and attention to every detail guarantees the satisfaction of even the most demanding customers.

### L-ALLE TECHNICAL SPECIFICATION

Insulated hatch thickness	1.02 in
Thickness of thermal insulation	0.79 in
Hatch colour from both sides	White
Wooden ladder	4 sections
Height of wooden box	5.31 in
Width of ladder	15.7 in
Width of step	14.1 in
Depth of step	3.15 in
Landing space	67.7 in
Opening distance/angle	66.1 in
Maximum ceiling height	129.9 in



STOCK SIZES  
47 X 21.5

SIZES ON REQUEST

51 X 21.5*	55 X 21.5*	47 X 23.5*
51 X 23.5*	55 X 23.5*	47 X 27.5 *
51 X 27.5*	55 X 27.5*	

R - VALUE FOR THE CENTER OF THE DOOR

Outer box dimensions, mounting opening 0.79 in larger

# STAIRLUXE

## WOODEN-METAL ATTIC LADDER

The UNI attic ladders are characterized by single sealing and hatch thickness of 1.02". The UNI model is perfect for houses where the attic is insulated and no additional thermal insulation is required. Thanks to its small dimensions, the UNI model is perfect for installation in narrow and small corridors. The small size of the stairs was achieved thanks to the use of a unique 4-section metal-wooden ladder. This model also has non-slip steps. They perfectly adhere to the ground, prevent scratching of the floor creating an aesthetic finish at the end of the ladder. The excellent quality of materials used for the production of attic ladders and attention to every detail guarantees the satisfaction of even the most demanding customers.

### UNI

#### TECHNICAL SPECIFICATION

Insulated hatch thickness	1.02 in
Thickness of thermal insulation	0.79 in
Hatch colour from both sides	White
Metal - Wooden ladder	4 sections
Height of wooden box	5.31 in
Width of ladder	14.4 in
Width of step	12.8 in
Depth of step	3.15 in
Landing space	39.8/53.1 in
Opening distance/angle	45.3/49.2/49.6 in
Maximum ceiling height	102.4/104.3 in



R VALUE



HATCH THICKNESS



PROTECTIVE FEET



MAXIMUM LOAD



SEAL



#### STOCK SIZES

31.5 X 23.5	35.5 X 23.5	39 X 23.5
31.5 X 27.5	35.5 X 27.5	39 X 27.5
31.5 X 31.5	35.5 X 31.5	

R - VALUE FOR THE CENTER OF THE DOOR

Outer box dimensions, mounting opening 0.79 in larger




# STAIRLUXE

## METAL SCISSOR ATTIC LADDER

The COMP attic ladders are characterized by single sealing and hatch thickness of 1.02". The COMP model is perfect for houses where the attic is insulated and no additional thermal insulation is required. Thanks to the solid extendable "scissor" ladder the COMP model is perfect for installation in rooms up to 9'5" height. The excellent quality of materials used for the production of attic ladders and attention to every detail guarantees the satisfaction of even the most demanding customers.

### COMP TECHNICAL SPECIFICATION

Insulated hatch thickness	1.02 in
Thickness of thermal insulation	0.79 in
Hatch colour from both sides	White
<b>Metal scissor ladder</b>	<b>10 steps</b>
Height of wooden box	5.31 in
Width of ladder	15.3 in
Width of step	13.6 in
Depth of step	3.15 in
Landing space	76.8/78.7/82.7 in
Opening distance/angle	86.6/88.6/90.5/96.6 in
Maximum ceiling height	114.2 in

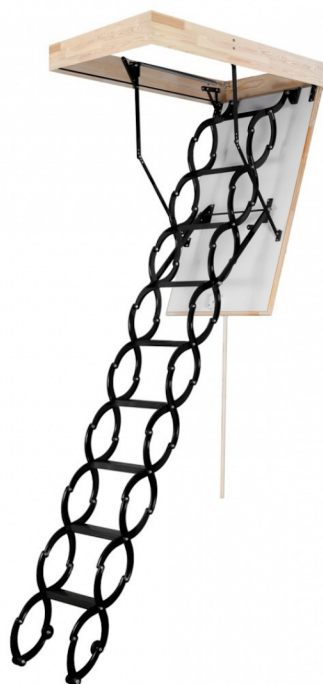

R VALUE



STEPS



PROTECTIVE  
FEET



MAXIMUM  
LOAD



SEAL



#### STOCK SIZES

27.5 X 23.5	27.5 X 27.5	31.5 X 23.5
31.5 X 27.5	35.5 X 23.5	35.5 X 27.5
	39 X 27.5	

#### SIZES ON REQUEST

39 X 23.5*	43 X 23.5*	47 X 23.5*
51 X 23.5*	43 X 27.5*	47 X 27.5*
	51 X 27.5*	

R - VALUE FOR THE CENTER OF THE DOOR

Outer box dimensions, mounting opening 0.79 in larger


# STAIRLUXE

## LONG METAL SCISSOR ATTIC LADDER

The L-COMP attic ladders are characterized by single sealing and hatch thickness of 1.02". The L-COMP model is perfect for houses where the attic is insulated and no additional thermal insulation is required. Thanks to the solid extendable "scissor" ladder the L-COMP model is perfect for installation in rooms up to 10' height. The excellent quality of materials used for the production of attic ladders and attention to every detail guarantees the satisfaction of even the most demanding customers.

### L-COMP TECHNICAL SPECIFICATION

Insulated hatch thickness	1.02 in
Thickness of thermal insulation	0.79 in
Hatch colour from both sides	White
<b>Metal scissor ladder</b>	<b>11 steps</b>
Height of wooden box	5.31 in
Width of ladder	15.3 in
Width of step	13.6 in
Depth of step	3.15 in
Landing space	80.71/86.61 in
Opening distance/angle	96.46/98.4/104.3 in
Maximum ceiling height	122 in

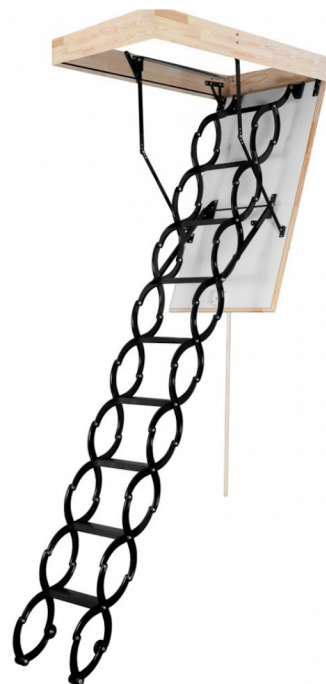

R VALUE



STEPS



PROTECTIVE FEET



MAXIMUM LOAD



SEAL



STOCK SIZES  
51 X 27.5

SIZES ON REQUEST

31.5 X 23.5*	35 X 23.5*	39 X 23.5*
43 X 23.5*	47 X 23.5*	51 X 23.5*
31.5 X 27.5*	35 X 27.5*	39 X 27.5*
39 X 27.5*	43 X 27.5*	47 X 27.5*

R - VALUE FOR THE CENTER OF THE DOOR

Outer box dimensions, mounting opening 0.79 in larger

# STAIRLUXE

## ALUMINUM ATTIC LADDER

The ALU attic ladders are characterized by single sealing and hatch thickness of 1.81". The ALU model is perfect for houses where the attic is not insulated and additional thermal insulation is required. One of the most distinctive features of ALU attic ladder is a light and very durable ladder made of high-quality aluminum. This model also has anti-skidding steps. They perfectly adhere to the ground, prevent scratching of the floor creating an aesthetic finish at the end of the ladder.

### ALU

#### TECHNICAL SPECIFICATION

Insulated hatch thickness	1.81 in
Thickness of thermal insulation	1.57 in
Hatch colour from both sides	White
<b>Aluminum ladder</b>	3 sections
Height of wooden box	6.69 in
Width of ladder	15.75 in
Width of step	13.78 in
Depth of step	3.15 in
Landing space	50.4/55.9 in
Opening distance/angle	63.4/65 in
Maximum ceiling height	110.2 in



RVALUE



HANDRAIL



PROTECTIVE FEET



MAXIMUM LOAD



SEAL



**STOCK SIZES**  
47 X 23.5

**SIZES ON REQUEST**

43 X 21.5*	47 X 21.5*	51 X 21.5*
55 X 21.5*	43 X 23.5*	51 X 23.5*
55 X 23.5*	43 X 27.5*	47 X 27.5*
51 X 27.5*	55 X 27.5*	

R - VALUE FOR THE CENTER OF THE DOOR

Outer box dimensions, mounting opening 0.79 in larger

## ACCESSORIES



### HATCH BALUSTRADE

**SIZES**

47 x 27.5

55 x 33.5



### LATCH DOOR PLASTIC CLIP



### HATCH DOOR LATCH



### HANDRAIL

**SIZES**

18 "

22 "



### MOUNTING SYSTEM





## ACCESSORIES



### EXTENSION STEP

#### SIZES

10x10x8

14x10x8



### MASKING BATTERN

#### SIZES

47x27.5



### WOODEN ROD WITH PLASTIC CLIP

#### SIZES

29"