

# META

6,68

RVALUE



MAXIMUM  
LOAD



PROTECTIVE  
FEET



SEALS



HANDRAIL



YEARS  
GUARANTEE



The mark of  
responsible forestry



# META 51 X 23.5

# 1.81 in

The META loft ladder is characterised by single sealing and hatch thickness 1.81 in. META model is ideally suited to conditions where the attic is poorly insulated and requires additional thermal insulation. This ladder is equipped with durable metal ladder, thanks to it the maximum load when using stairs is up to 463 lbs. Our non-slip feet included in META loft ladder provide an aesthetic finish for the ladder after cutting. To increase security and for comfortable use our META loft ladder is also equipped with stable and durable handrail. In the interest of user convenience, the handrail has been designed in such a way that it can be mounted on the left or right side depending on customer preferences. The excellent quality of materials used for the production of stairs and attention to every details of finish cause that the stairs will satisfy even the most demanding customers.

## Technical specification

Insulated hatch thickness	1.81 in
Thickness of thermal insulation	1.57 in
Hatch colour from both sides	White
Metal ladder	3 sections
Height of wooden box	6.69 in
Width of ladder	15.7 in
Width of step	14.2 in
Depth of step	4.45 in
Landing space	55.9 in
Opening distance/angle	65 in
Maximum ceiling height	110.2 in

### Box dimensions [in] AxB

51 x 23.5 AS. 51.18 x 23.62

Outer box dimensions, mounting opening 0.79 in larger

\*Mounting a handrail is unavailable

## Non-standard dimensions

Min - Max Length 43 - 55 in

Min - Max Width 21.5 - 33.5 in

\*Unusual dimensions available in full size of untypical stairs can not exceed 10.76 ft<sup>2</sup>

## Accessories



Masking batten




Mounting system



Hatch balustrade

## Technical draw

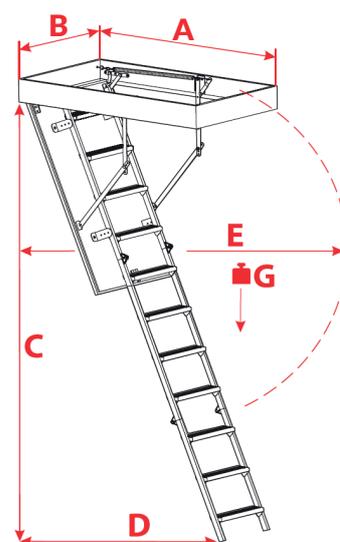

A > 39

C 110.2 in

D 55.9 in

E 65 in

G 463 lbs