



STALLUX TERMO



RVALUE



MAXIMUM
LOAD



PROTECTIVE
FEET



SEAL



HANDRAIL



YEARS
GUARANTEE



The mark of
responsible forestry



OMAN®

CLASSIC

EI

MINI

FLEX

SOLID

LONG

STALLUX TERMO 51 X 21.5

1.02 in

The STALLUX TERMO loft ladders are characterized by single sealing and hatch thickness 1.02 in. The STALLUX TERMO model is ideally suited to install where the attic is insulated and does not require additional thermal insulation. The distinctive feature of the STALLUX TERMO loft ladder is the solid and extremely durable metal - wooden 3-section ladder. The loft ladders have anti skidding feet, they adheres perfectly to the ground, prevent from scratching of the floor and provide an aesthetic finish for the ladder after cutting. For increased safety and convenience of use, STALLUX TERMO loft ladders are equipped in a stable and durable handrail. In the interest of user convenience, the handrail can be installed on the left or right side - depending on the customer preferences. The excellent quality of materials used for the production of loft ladders and attention to every detail of finish cause that the stairs will satisfy even the most demanding customers. Their maximum load during use is up to 352 lbs.

Technical specification

Insulated hatch thickness	1.02 in
Thickness of thermal insulation	0.79 in
Hatch colour from both sides	White
Metal-Wooden ladder	3 sections
Height of wooden box	5.31 in
Width of ladder	15.7 in
Width of step	14.1 in
Depth of step	3.15 in
Landing space	58.3 in
Opening distance/angle	65.3 in
Maximum ceiling height	110.2 in

Box dimensions [in] AxB

51 x 21.5 AS. 51.18 x 21.65

Outer box dimensions, mounting opening 0.79 in larger

Accessories



Masking
batten




Mounting
system



Hatch
balustrade

Technical draw

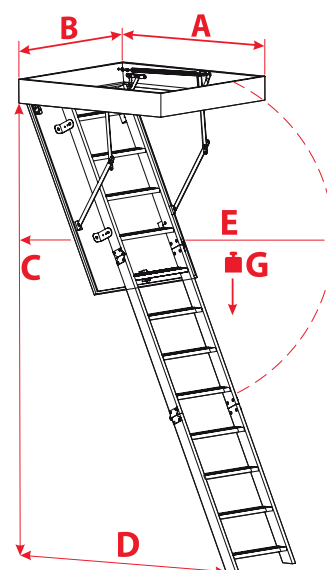

A > 43.5

C **110.2 in**

D **58.3 in**

E **65.3 in**

G **352 lbs**

Non-standard dimensions

Min - Max Length 43 - 55 in

Min - Max Width 39 - 43.5 in

*Unusual dimensions available in full size of untypical stairs can not exceed 10.76 ft²