

# ADDE

4,65  
RVALUE



MAXIMUM  
LOAD



PROTECTIVE  
FEET



SEAL



HANDRAIL



YEARS  
GUARANTEE



The mark of  
responsible forestry



COMPLIANCE WITH  
THE STANDARD



# ADDE 51 X 21.5

1.02 in

The ADDE loft ladders are characterized by single sealing and hatch thickness 1.02 in. The ADDE model is ideally suited to install where the attic is insulated and does not require additional thermal insulation. The distinctive feature of the ADDE loft ladder is the solid and extremely durable metal – wooden 3-section ladder. The loft ladders have anti skidding feet, they adheres perfectly to the ground, prevent from scratching of the floor and provide an aesthetic finish for the ladder after cutting. For increased safety and convenience of use, ADDE loft ladders are equipped in a stable and durable handrail. In the interest of user convenience, the handrail can be installed on the left or right side – depending on the customer preferences. The excellent quality of materials used for the production of loft ladders and attention to every detail of finish cause that the stairs will satisfy even the most demanding customers. Their maximum load during use is up to 352 lbs.

## Technical specification

Insulated hatch thickness	1.02 in
Thickness of thermal insulation	0.79 in
Hatch colour from both sides	White
Metal-Wooden ladder	3 sections
Height of wooden box	5.31 in
Width of ladder	15.7 in
Width of step	14.1 in
Depth of step	3.15 in
Landing space	58.3 in
Opening distance/angle	65.3 in
Maximum ceiling height	110.2 in

### Box dimensions [in] AxB

51 x 21.5 AS. 51.18 x 21.65

Outer box dimensions, mounting opening 0.79 in larger

## Accessories



Masking  
batten




Mounting  
system



Hatch  
balustrade

## Technical draw

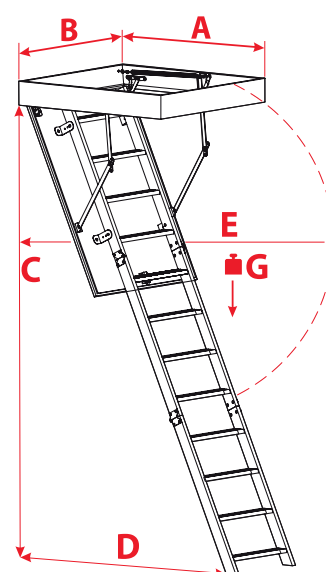

## Non-standard dimensions

Min - Max Length 43 - 55 in

Min - Max Width 39 - 43.5 in

\*Unusual dimensions available in full size of untypical stairs can not exceed 10.76 ft<sup>2</sup>

A > 43.5

C **110.2 in**

D **58.3 in**

E **65.3 in**

G **352 lbs**